

Energy saving 节能  
Stable 稳定  
Direct-drive 直驱



# DL7000 | Series

直驱式单针自动切线平缝车

SINGLE NEEDLE DIRECT DRIVE LOCKSTITCH  
MACHINE WITH THREAD TRIMMER



DL7000 - R HM 1 A - 32 - 13

机种别 Model

DL7000 直驱式单针自动切线平缝车  
Single needle direct drive lockstitch machine with thread trimmer

旋梭 Hook

1 高速缝梭头  
High speed hook

切边距离 Cutting Edge Width

No.	mm	inch
32	32	1/8
40	40	5/32
48	48	3/16
64	64	1/4
95	95	3/8

特性 Features

- R 右切刀  
Vertical cutting knife
- B 旋转式切线系统  
Rotary trimming system
- N 针送系统  
Needle feed





车缝布料 Sewing Material

- L 薄布料  
Light
- M 中厚布料  
Medium
- H 厚布料  
Heavy
- HM 中厚至厚布料  
Medium & heavy




自动切线 Auto Thread Trimmer


功能码 Function	快速倒缝 Reverse feeding	拔线杆 Wiper	自动抬押脚 Auto lifter
1 1	V	V	-
1 2	V	-	V
1 3	V	V	V

送布牙 Feed Dog

- 四排牙 4 rows of teeth	RM 二排牙 2 rows of teeth	A 三排牙 3 rows of teeth	RM 三排牙 3 rows of teeth
	32 		40 
			48
			64
			95

规格 Specification

机型 Model	 mm	 mm	 mm		Needle No. DBX1	S.P.M.(Max)	自动切线车选配 Auto Thread Trimmer M/C Option					选配Option
			手动 Hand	自动 Auto			代码 No.	快速倒缝 Reverse Feeding	拔线杆 Wiper	自动 抬押脚 Auto Lifter	伺服马达 Servo Motor	桌板Table
DL7000-L1	0-4	29.0	5.5	10-13	#9~#10	4000	11	V	V	-	T50D8S11 + TML4502CB-1	DL7000T-T1
DL7000-BH1	0-6	35.0			#20~#23	4000						
DL7000-BM1	0-5	30.7			#11~#14	4500						
DL7000-H1	0-6	35.0			12	V	-	V	T50D8S11 + TML4502CB-1			
DL7000-HM1	0-6	35.0								#11~#14	4000	
DL7000-M1	0-5	30.7								#11~#14	4500	
DL7000-RM1	0-5	30.7			13	V	V	V	T50D8S11 + TML4502CB-3			
DL7000-NM1	0-4	30.7								#11~#14	4500	
DL7000-NH1	0-5	30.7								#20~#23	4000	

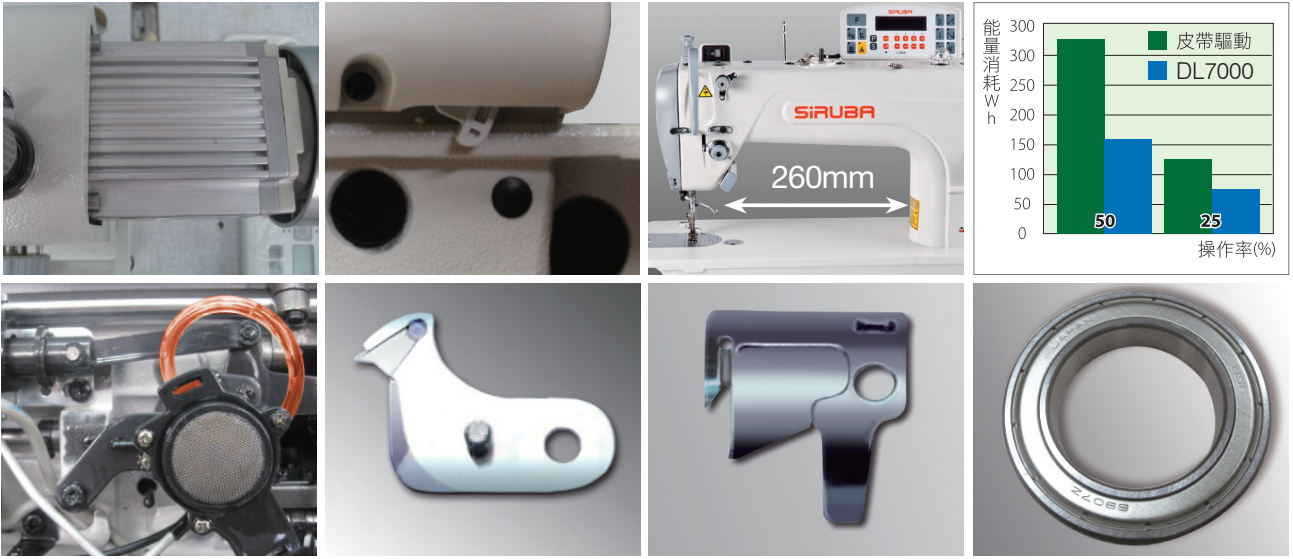

采用小型直驱伺服马达，起缝快速，定位精准，低噪音，无皮带屑污染  
Mini direct drive servo motor system provides quick start sewing, precise positioning, low noise, and no belt dust.



安全开关 机器倾斜时即停机，确保安全  
Safety switch Stops running when the machine is tilted to ensure safety.



操作空间大，方便缝制物移动  
Working space is wide for moving sewing material.



耗能小，较皮带驱动可节能35%  
Low power consumption, it saves 35% energy against V-belt driving.



全自动供油，确保机器在高速下的耐用性  
Auto-lubrication ensures the mechanism's durability in high speed.



两种切线机构可供选择: 平刀式，圆刀式  
Two options of thread trimming system: Horizontal, and rotary system.



大心由滚珠轴承传动，低磨损，低噪音  
Main shaft is adopted with bearing design. Low wearing, low noise.

**高林股份有限公司**  
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！  
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

**TOP 100**  
TAIWAN BRANDS



ISO 9001:2000  
ISO 14001:2004

CAT.S2013-12 FEB.13

